# Subregional RTEP Committee – Mid-Atlantic FirstEnergy Supplemental Projects

June 13, 2024

## Solutions

Stakeholders must submit any comments within 10 days of this meeting in order to provide time necessary to consider these comments prior to the next phase of the M-3 process



Need Number: PN-2024-020 Process Stage: Solution Meeting – 06/13/2024 Previously Presented: Need Meeting – 05/16/2024

#### **Project Driver(s):**

**Customer Service** 

#### Specific Assumption Reference(s)


New customer connection request will be evaluated per FirstEnergy's "Requirements for Transmission Connected Facilities" document and "Transmission Planning Criteria" document.

#### **Problem Statement**

New Customer Connection – A retail customer requested 115 kV service for load of approximately 31 MVA near the Geneva – Morgan Street 115 kV Line. The service request location is approximately one mile from Geneva Substation.

Requested in-service date is 05/31/2025

### Penelec Transmission Zone M-3 Process Geneva – Morgan Street 115 kV Line Customer Connection

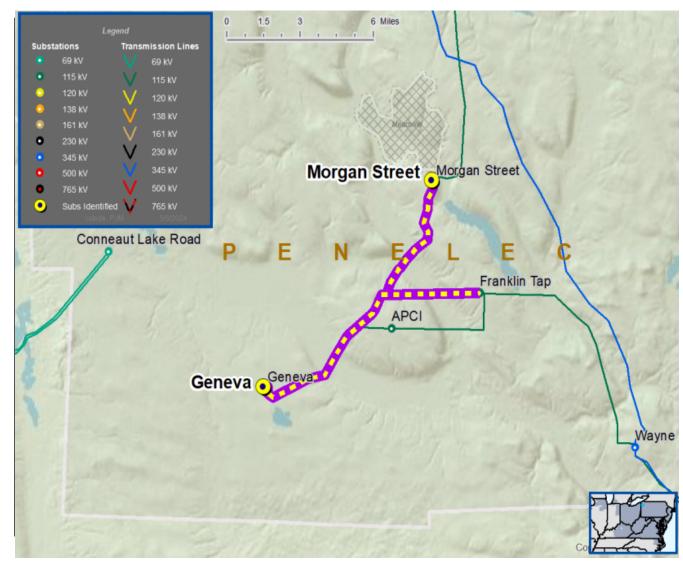



### Penelec Transmission Zone M-3 Process Geneva – Morgan Street 115 kV Line Customer Connection

Need Number: PN-2024-020 Process Stage: Solution Meeting – 06/13/2024

**Proposed Solution:** 


#### 115 kV Transmission Line Tap

- Install three SCADA controlled transmission line switches
- Construct approximately 1-2 spans of transmission line from tap point to customer substation
- Install one 115 kV revenue metering package at customer substation
- Modify relay settings at Geneva and Morgan Street substations

#### **Alternatives Considered:**

 No other feasible alternatives considered due to the customers proximity to the Geneva – Morgan Street 115 kV Line.

Estimated Project Cost: \$1.6M Projected In-Service: 5/31/2025 Status: Engineering

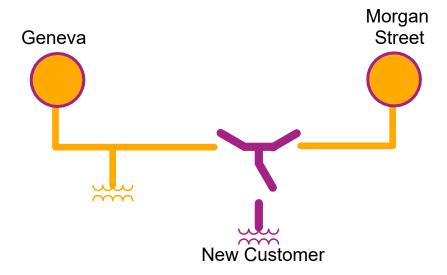

Legend	
500 kV	
345 kV	
115 kV	
69 kV	
34.5 kV	
23 kV	
New	



## Questions?

SRRTEP Committee: Mid-Atlantic – FirstEnergy Supplemental 06/13/2024

## Appendix

SRRTEP Committee: Mid-Atlantic – FirstEnergy Supplemental 06/13/2024

# High level M-3 Meeting Schedule

Assumptions

Activity	Timing
Posting of TO Assumptions Meeting information	20 days before Assumptions Meeting
Stakeholder comments	10 days after Assumptions Meeting

Timing

10 days before Needs Meeting

Needs

### Solutions

Submission of Supplemental Projects & Local Plan

Stakeholder comments	10 days after Needs Meeting
Activity	Timing
TOs and Stakeholders Post Solutions Meeting slides	10 days before Solutions Meeting
Stakeholder comments	10 days after Solutions Meeting

Activity	Timing
Do No Harm (DNH) analysis for selected solution	Prior to posting selected solution
Post selected solution(s)	Following completion of DNH analysis
Stakeholder comments	10 days prior to Local Plan Submission for integration into RTEP
Local Plan submitted to PJM for integration into RTEP	Following review and consideration of comments received after posting of selected solutions

Activity

TOs and Stakeholders Post Needs Meeting slides

# **Revision History**

6/03/2024 – V1 – Original version posted to pjm.com