



Draft Reactive Rate for Package E

Andrew Levitt
Market Design & Economics
PJM RPCTF

Solution matrix language: *“MVAR Rate will be based on the PJM average reactive rate as of 1/1/22.*

- *Total Reactive Compensation (approx. \$367 million) divided by*
- *System MVAR capability based on*
 - *Nominal plant **eDART Reportable MW** ratings of all units*
 - *95% Power Factor at Pmax*
 - *A rectangular D-curve [same min and max capability]”*
- **→ \$2,822/MVAR/year**
 - 2021 reactive compensation was \$367.0 m
 - Current system VAR capability based on above method is 130,048 MVAR
- Same rate for all resources
- In line with rates in ISO-NE (\$2,190/MVAR/year¹) and NYISO (\$2,919.13/MVAR/year²)

Note: Rate is still draft and subject to change


¹ ISO New England Tariff Schedule 2

² <https://www.nyiso.com/documents/20142/18145934/2021-OATT-MST-Schedule%202-VSS-Rates-Final.pdf/bda65a42-603b-3b47-4cec-d09c157c50df>

- Intent of Package E rate proposal is to take the ratio of:
 1. Status quo total annual reactive compensation of PJM fleet, to
 2. Status quo reactive capability
- Actual reactive capability is constantly changing, and in some cases consists of multiple capability curves (“D curves”).
- Package E therefore proposes use of a pro forma reactive capability of the fleet that is based on a recent snapshot of aggregate maximum power capability (“eDart Reportable MW”).

- 0.95 leading/lagging power factor is the Interconnection Service Agreement capability requirement for resources measured at the high-side of the generator step-up (GSU) transformer (i.e., non-synchronous machines).
 - *The GSU high-side is equivalent to the delivery point at which VARs benefit PJM.*
- Therefore, Package E proposes that the pro-forma capability for use in calculating the reactive rate be based on 0.95 leading/lagging capability relative to maximum power capability.

- Generators have different D-curve shapes—some are wider at Pmin (more “D”), some are thinner (more “<”). Many are rectangular (e.g., figure at right).
- Therefore, Package E proposes a rectangular pro-forma reactive capability.

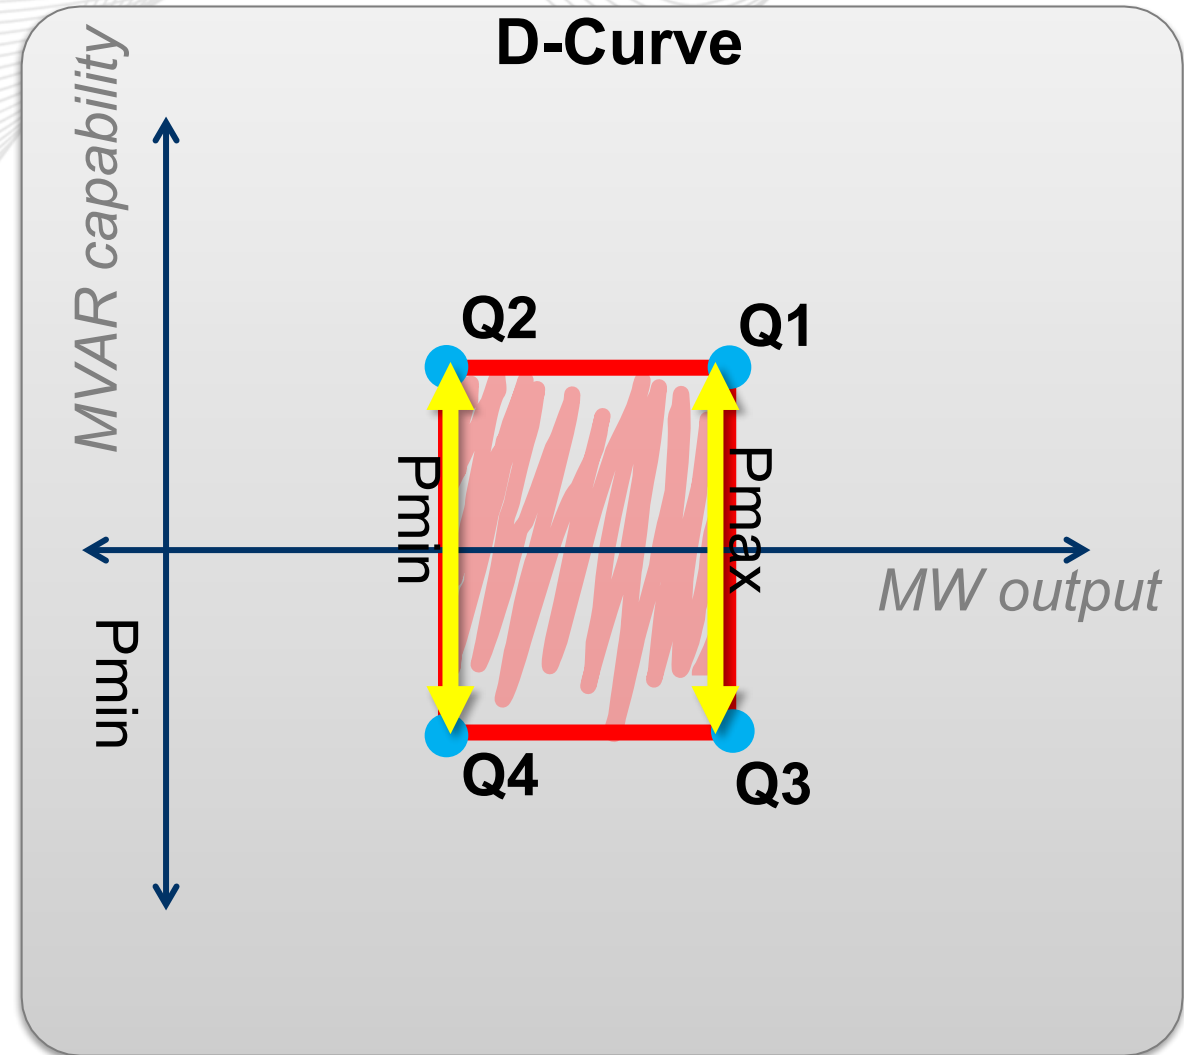

- Monitoring Analytics 2021 State of the Market annual report lists total 2021 reactive capability (i.e., Schedule 2) compensation of \$367.0 million.
- PJM eDART system reports current aggregate maximum power (i.e., “eDART Reportable MW”) is 197,832 MW.

Power systems engineering math:

- P = power (MW)
- Q = reactive power (MVAR)
- S = apparent power (MVA)
- $S^2 = P^2 + Q^2$

Inputs

- Power factor = $P/S = 0.95$
- $P = 197,832$


Results

- $Q1 \rightarrow 65,024.23$
- $Q2 = Q1$
- $Q3 = Q4 = -Q1$

Capability metric =

$$\text{AVG}(Q1, Q2) - \text{AVG}(Q3, Q4) =$$

130,048 MVAR (lead + lag)

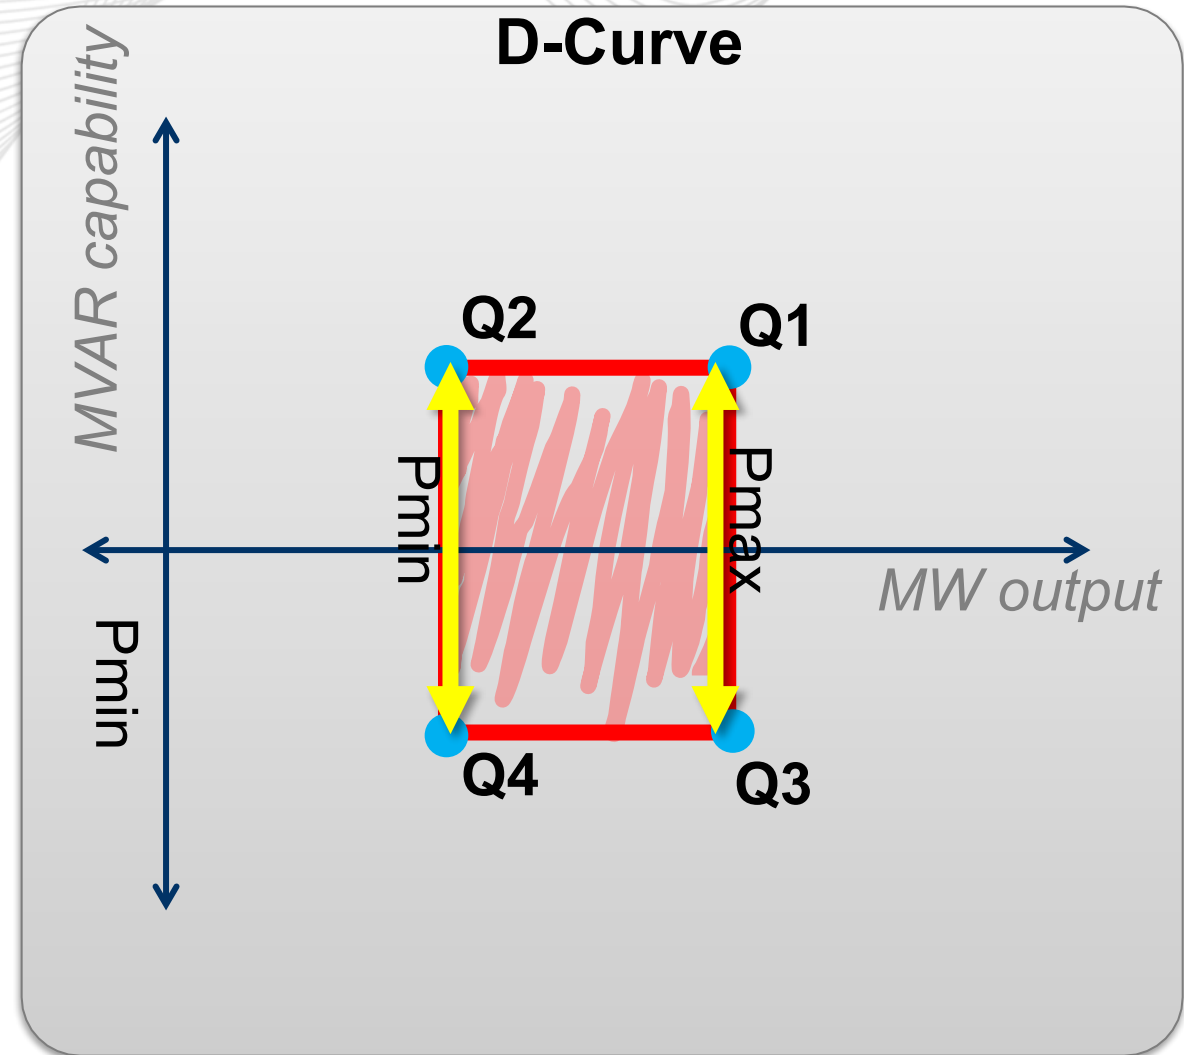

- $A = 2021 \text{ annual compensation} = \367.0m/year
- $B = \text{Capability metric} = 130,048 \text{ MVAR}$

- $\text{Rate} = A/B$

Draft reactive rate = \$2,822/MVAR/yr